




Blue Series Woofer **BSW 184-II**



- 18 inch / 46 cm high definition bass driver
- blue die cast basket
- three fold coated fabric surround
- lin. excursion +/- 5 mm
- built for extremely high dynamic bass response (SPL max. above 120 dB)
- X-large silver screw terminals
- progressive spider
- very high efficiency


Gehäusevorschläge / recommended enclosures:

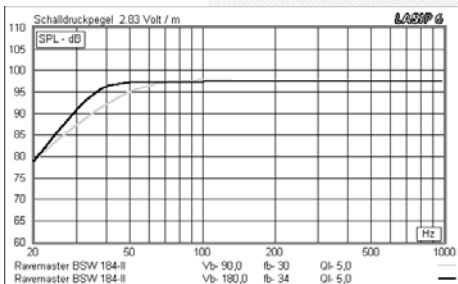

BSW 184-II


Basreflex aktive: volume 90 l,
Port: 3 x BR 8136 X + BR 8136 A + BR 8136 XT
[3 x 6 cm x 20 cm]

Basreflex aktive: volume 180 l,
Port: 3 x BR 8146 X + BR 8146 XT
[3 x 9 cm x 15 cm]

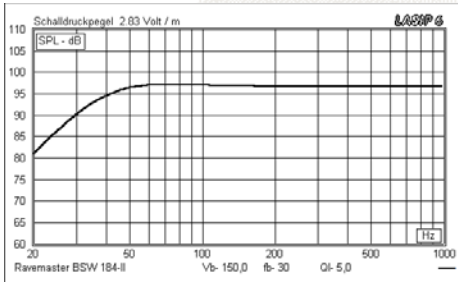

BSW 184-II

Basreflex passive: volume 150 l,
Port: 2 x BR 8146 X + BR 8146 A + BR 8146 XT
[2 x 9 cm x 20 cm]

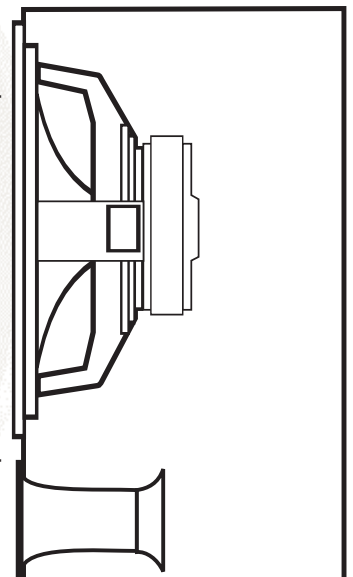

Technische Daten und Parameter / technical data and parameter

Nom. Impedanz Ohm / nom. impedance ohms:	4	Mech. Dämpfung / mech. damping Qms:	2.20
Aussendurchmesser / overall diameter mm:	463	Elekt. Dämpfung / elect. damping Qes:	0.36
Einbaudurchmesser / mounting diameter mm:	425	Gesamt Dämpfung / total damping Qts:	0.31
Einbautiefe / mounting depth mm:	213	Äquivalentvol. / equivalent vol. VAS (L):	328
Re Ohm / RDC ohms:	3.2	Membranfläche / cone area (cm ²):	1190
Resonanzfrequenz / resonance frequency Fs (Hz)	26	Schalldruck / sound pressure level SPL dB:	98